

FLOORPAN

Laminate Flooring

FLOORPAN

FIX
AC3/31 7MM

FLOORPAN

CLASSIC
AC4/32 8MM

FLOORPAN

PRIME
AC4/32 8MM 4V

FLOORPAN

RIVER
AC4/32 8MM 4V

FLOORPAN

WINGS
AC5/33 8MM 4V

FLOORPAN

URBAN
AC5/33 8MM 4V

50
YEARS



KASTAMONU



WORLD’S FIRST ECO LABEL “**BLUE ANGEL**” BELONGS
TO FLOORPAN FOR THE FIRST TIME IN TURKEY

“The Blue Angel” is a certificate stating that laminate flooring products do not contain any chemicals that could be hazardous to health or environment.



VOCs (volatile organic compounds) affect indoor air quality. Kastamonu Entegre has the VOCs of its products are regularly checked according to the latest standards.



An Environmental Product Declaration (EPD) is an independently verified and registered document that communicates transparent and comparable information about the life-cycle environmental impact of products in a credible way. EPDs are available for Kastamonu Entegre products.



The products in our collections with the **Hygiene**⁺ feature, indicating they are produced with superior technology, leave no room for bacteria and germs to reproduce. Tests carried out on our **Hygiene**⁺ collections have proven that the bacterial activity typically seen within 24h is prevented by up to 99,9% percent. (Tested in line with ISO 22196.)

FLOORPAN

FIX
AC3/31 7MM

FIX

AC3/31 7MM

The potencial that encourages creativity in designs. The talent that brings modern life into spaces...
The comfort noticed at each step.





FF006 MUSON

Surface: Authentic



FF006 MUSON



FF005 KARAYEL

Surface: Authentic



FF005 KARAYEL

THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



1205 mm

197 mm



FAST AND EASY ASSEMBLY



RESISTANT TO UV RAYS



ENVIRONMENTALLY FRIENDLY



RESISTANT TO CIGARETTE FIRE



EASILY CLEANED AND MAINTAINED, HYGIENIC



RESISTANT TO FURNITURE WHEEL ABRASION



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO POINT STRIKES



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO SCRATCH



NOT AFFECTED BY STAINS



E1 GRADE

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)				Min. 5 (group 1,2 and 3)

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN FIX	197x1205 mm	7 mm	Authentic	12 Pieces	2,85 m	60 Pieces	~17 kg	L2C	Without Bevel

SE: SELECT / KASTAMONU

Enjoy Comfort Anywhere With Floorpan!



TECHNICAL DATA SHEET				
FLOORPAN FIX		7 MM - CLASS 31 - AC3		
THICKNESS		mm	7	EN 13329+A1
WIDTH		mm	197	EN 13329+A1
LENGHT		mm	1205	EN 13329+A1
SURFACE			Authentic	
EUROPEAN STANDARD		-		EN13329
PACKAGE THE DETAILS				
PIECE		12 piece / 1 package		
M²		2,849 m ²		
KG		17 kg		
PALLET THE DETAILS				
PIECE		60 package / 1 pallet		
M²		170,94 m ²		
KG		1060 kg		
CLASS		-	31	EN 13329+A1
ABRASION RESISTANCE		-	AC3	EN 13329+A1
THICKNESS SWELLING		%	≤18	ISO 24336
RESISTANCE TO IMPACT	SMALL BALL	N	≥8	EN 13329+A1
	LARGE BALL	mm	≥500	EN 13329+A1
WARRANTY DOMESTIC / COMMERCIAL		Years	10/5	-
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438
SURCAFE SOUNDNESS		N/mm²	≥1.0	EN 13329+A1
LOCK STRENGTH	LENGHT	kN/m	-	ISO 24334
	WIDTH	kN/m	-	
EFFECT OF A CASTOR CHAIR		25.000 Cycles	No Damage	EN 425:2002
EFFECT OF A FURNITURE LEG		-	No Damage	EN 424
OPENING BETWEEN ELEMENTS		mm	≤0,20	EN 13329+A1
HEIGHT DIFFIRENCE BETWEEN ELEMENTS		mm	≤0,15	EN 13329+A1
MOISTURE CONTENT		%	4-10	EN 322
FIRE RESISTANCE		Class	C _s S1	EN 9239-1
FORMALDEHYDE EMISSION		mg/m²h	≤3,5 (E1)	EN 12460-3



Our products can also be produced with FSC and CARB certification upon request.

CLASSIC

AC4/32 8MM

FLOORPAN
CLASSIC
AC4/32 8MM



Classic and classy as well. A culture passed down from generation to generation.
A split that winks at the future with the experience of the past...



FLOORPAN CLASSIC



FC074 CORPUS OAK

Surface: Timberland



FC074 CORPUS OAK

FLOORPAN CLASSIC



FC048 ASSOS OAK

Surface: Timberland



FC048 ASSOS OAK

FLOORPAN CLASSIC




FC035 NATURAL MESE

Surface: Timberland



FC035 NATURAL MESE


THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



FAST AND EASY ASSEMBLY



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO UV RAYS



RESISTANT TO POINT STRIKES



ENVIRONMENTALLY FRIENDLY



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO CIGARETTE FIRE



RESISTANT TO SCRATCH



EASILY CLEANED AND MAINTAINED, HYGIENIC



NOT AFFECTED BY STAINS



RESISTANT TO FURNITURE WHEEL ABRASION



E1 GRADE

1205 mm

197 mm

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)			Min. 5 (group 1,2 and 3)	

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m ²	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN CLASSIC	197x1205 mm	8 mm	Timberland	8 Pieces	1,89 m ²	60 Pieces	~14 kg	L2C	Without Bevel

SE: SELECT / KASTAMONU EX: EXCLUSIVE / GEBZE PL: PLUS / ADANA

17

Enjoy Comfort Anywhere With Floorpan!

TECHNICAL DATA SHEET

FLOORPAN
CLASSIC

8 MM - CLASS 32 - AC4

THICKNESS	mm	8	EN 13329+A1	
WIDTH	mm	197	EN 13329+A1	
LENGHT	mm	1205	EN 13329+A1	
SURFACE	Timberland			
EUROPEAN STANDARD	-	15 YEARS DOMESTIC USE GUARANTEE AC4 15 YEARS COMMERCIAL USE GUARANTEE	EN13329	
PACKAGE THE DETAILS				
PIECE	8 piece / 1 package			
M ²	1,899 m ²			
KG	14 kg			
PALLET THE DETAILS				
PIECE	60 package / 1 pallet			
M ²	113,94 m ²			
KG	840 kg			
CLASS	-	32	EN 13329+A1	
ABRASION RESISTANCE	-	AC4	EN 13329+A1	
THICKNESS SWELLING	%	≤18	ISO 24336	
RESISTANCE TO IMPACT	SMALL BALL	N	≥12	EN 13329+A1
	LARGE BALL	mm	≥750	EN 13329+A1
WARRANTY DOMESTIC / COMMERCIAL	Years	15/10	-	
RESISTANCE TO STAINING	-	Min. 5 (group 1 and 2) Min. 4 (group 3)		EN 438
SURCAFE SOUNDNESS	N/mm ²	≥1.25	EN 13329+A1	
LOCK STRENGTH	LENGHT	kN/m	f _{l0,2} ≥ 1	ISO 24334
	WIDTH	kN/m	f _{s0,2} ≥2	
EFFECT OF CASTOR CHAIR ^a	25.000 Cycles	No Damage ^a		EN 425:2002 ^b
EFFECT OF A FURNITURE LEG	-	No damage shall be visible when tested with foot type 0		EN 424
OPENING BETWEEN ELEMENTS. (0)	mm	0 average ≤ 0,15 mm 0 max. ≤ 0,20 mm		EN 13329+A1
HEIGHT DIFFERENCE BETWEEN ELEMENTS, (H)	mm	h average ≤ 0,10 mm h max. ≤ 0,15 mm		EN 13329+A1
MOISTURE CONTENT	%	4-10	EN 322	
FIRE RESISTANCE	Class	C _s S1	EN 9239-1	
FORMALDEHYDE EMISSION	mg/m ² h	≤3,5 (E1)	EN 12460-3	

Our products can also be produced with FSC and CARB certification upon request.

18

PRIME

AC4/32 4V 8MM

FLOORPAN

PRIME
AC4/32 8MM 4V



Always favorite and charming. Harmonious, balanced, high quality.
The first choice for groundbreaking designs...



FR009 MOSTAR

Surface: Impact



FR009 MOSTAR

FLOORPAN PRIME



FR011 GOLDEN GATE

Surface: Impact



FR011 GOLDEN GATE



FR012 RIALTO

Surface: Impact



FR012 RIALTO

FLOORPAN PRIME




FR014 ERASMUS

Surface: Impact



FR014 ERASMUS

THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



FAST AND EASY ASSEMBLY



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO UV RAYS



RESISTANT TO POINT STRIKES



ENVIRONMENTALLY FRIENDLY



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO CIGARETTE FIRE



RESISTANT TO SCRATCH



EASILY CLEANED AND MAINTAINED, HYGIENIC



NOT AFFECTED BY STAINS



RESISTANT TO FURNITURE WHEEL ABRASION



E1 GRADE

1205 mm

193 mm

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)			Min. 5 (group 1,2 and 3)	

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m ²	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN PRIME	193x1205 mm	8 mm	Impact	8 Pieces	1,86 m ²	60 Pieces	~14 kg	L2C	With Bevel

SE: SELECT / KASTAMONU EX: EXCLUSIVE / GEBZE PL: PLUS / ADANA

28

Enjoy Comfort Anywhere With Floorpan!

KASTAMONU

Technical DATA SHEET						
FLOORPAN PRIME		8 MM - CLASS 32 - AC4				
THICKNESS	mm	8	EN 13329+A1			
WIDTH	mm	193	EN 13329+A1			
LENGHT	mm	1205	EN 13329+A1			
SURFACE		Impact				
EUROPEAN STANDARD	-	15 YEARS DOMESTIC USE GUARANTEE 15 YEARS COMMERCIAL USE GUARANTEE	EN 13329			
PACKAGE DETAILS						
PIECE		8 piece / 1 package				
M ²		1,86 m ²				
KG		14 kg				
PALLET DETAILS						
PIECE		60 package / 1 pallet				
M ²		111,66 m ²				
KG		840 kg				
CLASS	-	32	EN 13329+A1			
ABRASION RESISTANCE	-	AC4	EN 13329+A1			
THICKNESS SWELLING	%	≤18	ISO 24336			
RESISTANCE TO IMPACT	SMALL BALL	N	EN 13329+A1			
	LARGE BALL	mm				
WARRANTY DOMESTIC / COMMERCIAL		Years	15/10	-		
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5		
SURCAFE SOUNDNESS		N/mm ²	≥1.25	EN 13329+A1		
LOCK STRENGTH	LENGHT	kN/m	f _{l0,2} ≥ 1	ISO 24334		
	WIDTH	kN/m	f _{s0,2} ≥ 2			
EFFECT OF A CASTOR CHAIR		25.000 Cycles	No Damage	EN 425:2002		
EFFECT OF A FURNITURE LEG		-	No Damage	EN 424		
OPENING BETWEEN ELEMENTS		mm	≤0,20	EN 13329+A1		
HEIGHT DIFFIRENCE BETWEEN ELEMENTS		mm	≤0,15	EN 13329+A1		
MOISTURE CONTENT		%	4-10	EN 322		
FIRE RESISTANCE		Class	C _s S1	EN 9239-1		
FORMALDEHYDE RELEASE		mg/m ² h	≤3,5 (E1)	EN 12460-3		
SLIP RESISTANCE		Class	DS	EN 13893:2003		
IMPACT SOUND REDUCTION		dB	14	EN ISO 10140-3		
THERMAL RESISTANCE		(m ² K)/W	0,05	EN 12664:2009		

Our products can also be produced with FSC and CARB certification upon request.

29

RIVER

AC4/32 4V 8MM

FLOORPAN

RIVER


AC4/32 8MM 4V

Timeless spaces with laminate floorings equipped with special hygiene technology...



Water Resistant
Laminate Flooring



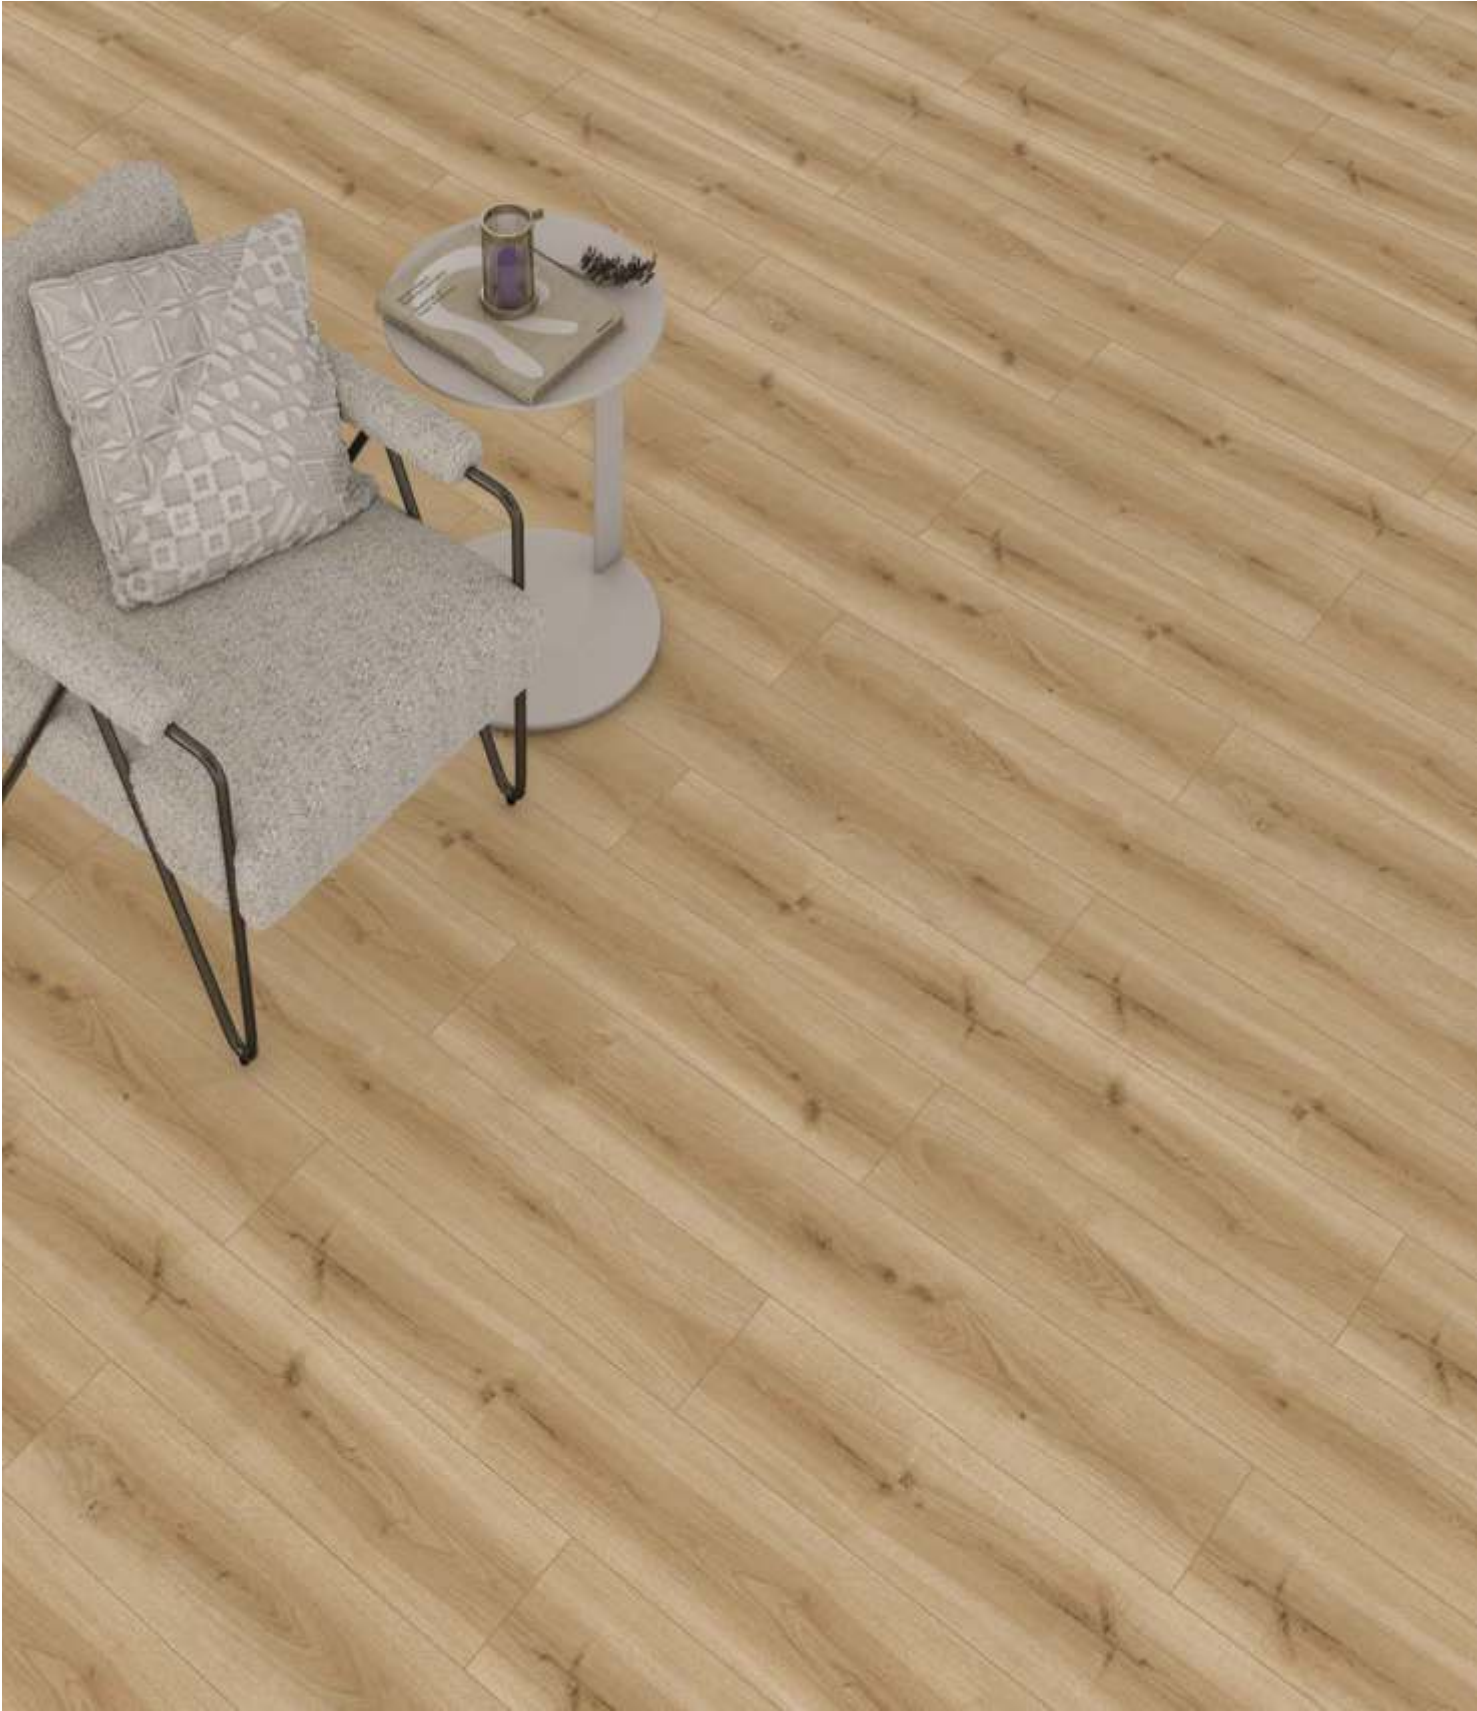


FRV007 TRENT OAK

Surface: Authentic



FRV007 TRENT OAK


THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



FAST AND EASY ASSEMBLY



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO UV RAYS



RESISTANT TO POINT STRIKES



ENVIRONMENTALLY FRIENDLY



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO CIGARETTE FIRE



RESISTANT TO SCRATCH



EASILY CLEANED AND MAINTAINED, HYGIENIC



NOT AFFECTED BY STAINS



RESISTANT TO FURNITURE WHEEL ABRASION



E1 GRADE

1205 mm

197 mm

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)			Min. 5 (group 1,2 and 3)	

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m ²	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN RIVER	197x1205 mm	8 mm	Authentic	8 Pieces	1,899 m ²	60 Pieces	~14 kg	L2C	With Bevel

SE: SELECT / KASTAMONU EX: EXCLUSIVE / GEBZE PL: PLUS / ADANA

33

Enjoy Comfort Anywhere With Floorpan!

 KASTAMONU

TECHNICAL DATA SHEET									
FLOORPAN RIVER		8 MM - CLASS 32 - AC4							
THICKNESS	mm	8	EN 13329+A2						
WIDTH	mm	197	EN 13329+A2						
LENGHT	mm	1205	EN 13329+A2						
SURFACE		Authentic							
EUROPEAN STANDARD	-		EN 13329						
PACKAGE DETAILS									
PIECE	8 piece / 1 package								
Area (m ²)	1,9 m ²								
Weight (kg)	14 kg								
PALLET DETAILS									
PACKAGE	56 package / 1 pallet								
Area (m ²)	106,4 m ²								
Weight (kg)	810 kg								
CLASS	-	32	EN 13329+A2						
ABRASION RESISTANCE	-	AC4	EN 13329+A2						
THICKNESS SWELLING	%	≤18	ISO 24336						
SURFACE SWELLING (Assembled joint)	Qualitative Rating	Rating (1-5)	≤2	ISO 4760 (NALFA 72h)					
	Quantitative Rating	mm	≤0,3						
RESISTANCE TO IMPACT	SMALL BALL	N	≥12	EN 13329+A2					
	LARGE BALL	mm	≥750						
WARRANTY DOMESTIC / COMMERCIAL	Years	15/10	-						
RESISTANCE TO STAINING	-	Min. 5 (group 1 and 2) Min. 4 (group 3)		EN 438-2_5					
SURSAFE SOUNDNESS	N/mm ²	≥1.25	EN 13329+A2						
LOCK STRENGTH	LENGHT	kN/m	fl0,2 ≥ 1	ISO 24334					
	WIDTH	kN/m	fs0,2 ≥2						
EFFECT OF CASTOR CHAIR	25.000 Cycles	No Damage		EN 425:2002					
EFFECT OF A FURNITURE LEG	-	No Damage		EN 424					
OPENING BETWEEN ELEMENTS	mm	≤0,20	EN 13329+A2						
HEIGHT DIFFERENCE BETWEEN ELEMENTS	mm	≤0,15	EN 13329+A2						
MOISTURE CONTENT	%	4-10	EN 322						
FIRE RESISTANCE	Class	C _s S1	EN 9239-1						
FORMALDEHYDE RELEASE	mg/m ² h	E0≤1,75 1,75≤E1≤3,5		EN 12460-3					
SLIP RESISTANCE	Class	DS	EN 14041:2008						
THERMAL CONDUCTIVITY	W/(m K)	0.148	EN 12667:2001						
SOUND RATING	dB	14	ISO 717-2						



Water Resistant Laminate Flooring

Our products can also be produced with FSC and CARB certification upon request.

34

WINGS

AC5/33 4V 8MM

FLOORPAN

WINGS

AC5/33 8MM 4V



Reflection of aesthetics and harmony in living spaces. An energy that lifts you above the clouds. A source of comfort noticed at first glance...

FLOORPAN WINGS



FW003 HAWK

Surface: Sky



FW003 HAWK

FLOORPAN WINGS




FW010 LARK

Surface: Sky




FW010 LARK

THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



FAST AND EASY ASSEMBLY



RESISTANT TO UV RAYS



ENVIRONMENTALLY FRIENDLY



RESISTANT TO CIGARETTE FIRE



EASILY CLEANED AND MAINTAINED, HYGIENIC



RESISTANT TO FURNITURE WHEEL ABRASION



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO POINT STRIKES



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO SCRATCH



NOT AFFECTED BY STAINS



E1 GRADE

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)				Min. 5 (group 1, 2 and 3)

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m ²	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN WINGS	197x1205 mm	8 mm	Sky	8 Pieces	1,899 m ²	60 Pieces	~14 kg	Unidrop	With Bevel

SE: SELECT / KASTAMONU EX: EXCLUSIVE / GEBZE PL: PLUS / ADANA

Enjoy Comfort Anywhere With Floorpan!

TECHNICAL DATA SHEET

FLOORPAN
WINGS

8 MM - CLASS 33 - AC5

THICKNESS		mm	8	EN 13329+A1
WIDTH		mm	197	EN 13329+A1
LENGHT		mm	1205	EN 13329+A1
SURFACE			Sky	
EUROPEAN STANDARD		-	25 YEARS DOMESTIC GUARANTEE  33 ACS 25 YEARS COMMERCIAL USE GUARANTEE ISO EN 13329 A11	EN13329
PACKAGE DETAILS				
PIECE		8 piece / 1 package		
M ²		1,9 m ²		
KG		14 kg		
PALLET DETAILS				
PIECE		60 package / 1 pallet		
M ²		113,9 m ²		
KG		855 kg		
CLASS		-	33	EN 13329+A1
ABRASION RESISTANCE		-	AC5	EN 13329+A1
THICKNESS SWELLING		%	≤15	ISO 24336
RESISTANCE TO IMPACT	SMALL BALL	N	≥15	EN 13329+A1
	LARGE BALL	mm	≥1000	
WARRANTY DOMESTIC / COMMERCIAL		Years	25/15	-
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5
SURCAFE SOUNDNESS		N/mm ²	≥1.25	EN 13329+A1
LOCK STRENGTH	LENGHT	kN/m	f10,2 ≥ 1	ISO 24334
	WIDTH	kN/m	fs0,2 ≥2	
EFFECT OF CASTOR CHAIR ^a		25.000 Cycles	No Damage	EN 425:2002
EFFECT OF A FURNITURE LEG		-	No Damage	EN 424
OPENING BETWEEN ELEMENTS. (0)		mm	≤0,20	EN 13329+A1
HEIGHT DIFFERENCE BETWEEN ELEMENTS, (H)		mm	≤0,15	EN 13329+A1
MOISTURE CONTENT		%	4-10	EN 322
FIRE RESISTANCE		Class	C _{fl} S1	EN 9239-1
FORMALDEHYDE RELEASE		mg/m²h	≤3,5 (E1)	EN 12460-3
SLIP RESISTANCE		Class	-	EN 13893:2003
IMPACT SOUND REDUCTION		dB	15	EN ISO 10140-3
THERMAL RESISTANCE		(m²K)/W	0,0614	EN 12667:2001



Our products can also be produced with FSC and CARB certification upon request.

URBAN

AC5/33 4V 8MM

FLOORPAN

URBAN

AC5/33 8MM 4V



The expression of urban and modern life. Structure resistant to intense pace and dynamism surrounding it. The unique talent that responds to each need...



FU007 PEKING

Surface: Authentic



FU007 PEKING




FU011 MOSKOVA

Surface: Authentic



FU011 MOSKOVA


THE ADVANTAGES
OF FLOORPAN LAMINATE FLOORING



FAST AND EASY ASSEMBLY



SUITABLE FOR UNDERFLOOR HEATING



RESISTANT TO UV RAYS



RESISTANT TO POINT STRIKES



ENVIRONMENTALLY FRIENDLY



BASE PANEL, HIGH DENSITY FIBERBOARD



RESISTANT TO CIGARETTE FIRE



RESISTANT TO SCRATCH



EASILY CLEANED AND MAINTAINED, HYGIENIC



NOT AFFECTED BY STAINS



RESISTANT TO FURNITURE WHEEL ABRASION



E1 GRADE

1205 mm

197 mm

LAMINATE FLOORING CLASSIFICATION

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)				Min. 5 (group 1,2 and 3)

PRODUCT	PANEL SIZE	THICKNESS	SURFACE	PANEL / PACKAGE	PACKAGE m ²	PACKAGE / PALLET	PACKAGE kg	LOCKS	BEVELS
FLOORPAN URBAN	197x1205 mm	8 mm	Authentic	8 Pieces	1,899 m ²	60 Pieces	~14 kg	Unidrop	With Bevel

SE: SELECT / KASTAMONU EX: EXCLUSIVE / GEBZE PL: PLUS / ADANA

47

Enjoy Comfort Anywhere With Floorpan!

TECHNICAL DATA SHEET						
FLOORPAN URBAN		8 MM - CLASS 33 - AC5				
THICKNESS	mm	8	EN 13329+A1			
WIDTH	mm	197	EN 13329+A1			
LENGHT	mm	1205	EN 13329+A1			
SURFACE		Authentic				
EUROPEAN STANDARD	-	25 YEARS DOMESTIC USE GUARANTEE 15 YEARS COMMERCIAL USE GUARANTEE	EN 13329			
PACKAGE DETAILS						
PIECE		8 pieces / 1 package				
M ²		1,899 m ²				
KG		13,9 kg				
PALLET DETAILS						
PIECE		60 packages / 1 pallet				
M ²		113,94 m ²				
KG		840 kg				
CLASS	-	33	EN 13329+A1			
ABRASION RESISTANCE	-	AC5	EN 13329+A1			
THICKNESS SWELLING	%	≤15	ISO 24336			
RESISTANCE TO IMPACT	SMALL BALL	N	EN 13329+A1			
	LARGE BALL	mm				
WARRANTY DOMESTIC / COMMERCIAL		Years	25/15	-		
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5		
SURFACE SOUNDNESS		N/mm ²	≥1.25	EN 13329+A1		
LOCK STRENGTH	LENGHT	kN/m	f _{l0,2} ≥ 1	ISO 24334		
	WIDTH	kN/m	f _{s0,2} ≥ 2			
EFFECT OF A CASTOR CHAIR		25,000 Cycles	No Damage	EN 425:2002		
EFFECT OF A FURNITURE LEG		-	No Damage	EN 424		
OPENING BETWEEN ELEMENTS		mm	≤0,20	EN 13329+A1		
HEIGHT DIFFERENCE BETWEEN ELEMENTS		mm	≤0,15	EN 13329+A1		
MOISTURE CONTENT		%	4-10	EN 322		
FIRE RESISTANCE		Class	C _s S1	EN 9239-1		
FORMALDEHYDE RELEASE		mg/m ² h	≤3,5 (E1)	EN 12460-3		
SLIP RESISTANCE		Class	DS	EN 14041:2008		
THERMAL CONDUCTIVITY		W/(m K)	0.15	EN 12667:2001		
SOUND RATING		dB	15	ISO 717-2		



FSC
Produced in the facilities where
ISO 9001 Quality Management
System is applied.



Hygiene



V4



BLUE ANGEL
Produced in the facilities where
ISO 9001 Quality Management
System is applied.



ISO 9001
Produced in the facilities where
ISO 9001 Quality Management
System is applied.



UNIDROP
PATENTED TECHNOLOGY ®



A+
Produced in the facilities where
ISO 9001 Quality Management
System is applied.




TURKEY
ENVIRONMENTAL PRODUCT
DECLARATION

Our products can also be
produced with FSC and CARB
certification upon request.

48

ACESSÓRIOS

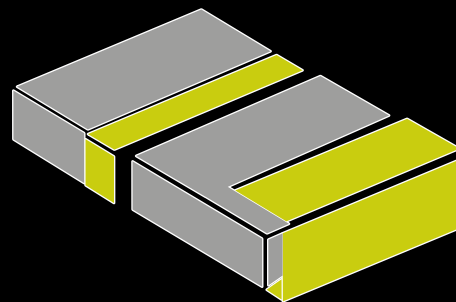

Perclíc[®]
Perfis

PERFIS DE ACABAMENTO

TRANSIÇÃO
REMATE
DESNÍVEL
BASE
CANTONEIRA

RODAPÉ EM PVC

70 MM
100 MM

SUB CAMADA - UNDERLAY

NOMAFLOOR COMFORT 2.2MM AQUASTOP
NOMAFLOOR SPECIAL HEATFLOW 1MM AQUASTOP
EVA PERCLIC 2MM


DEGRAU DE ESCADA

Acessórios para pavimento flutuante laminado


PERFIS DE ACABAMENTO

*Disponíveis em todas as **cores** dos pavimentos apresentados neste catálogo


*Gama de perfis autoadesivos de 90cm disponível em alumínio em PVC




PERFIL DE TRANSIÇÃO
Ref.:P.250.T40



PERFIL DE REMATE
Ref.:P.250.F30



PERFIL DE DESNÍVEL
Ref.:P.250.C40



BASE DE ALUMÍNIO
Ref.:P.250.B10



CANTONEIRA
Ref.:P.250.C23.23

RODAPÉS EM PVC


Rodapé em PVC Expandido revestido a PVC/PVM

*Disponíveis em todas as **cores** dos pavimentos apresentados neste catálogo

- ✓ Resistente à humidade
- ✓ Resistente a riscos e manchas
- ✓ Reciclável

Dimensões:

70x14x2500mm | R08.250.70.14-...
100x14x2500mm | R08.250.100.14-...

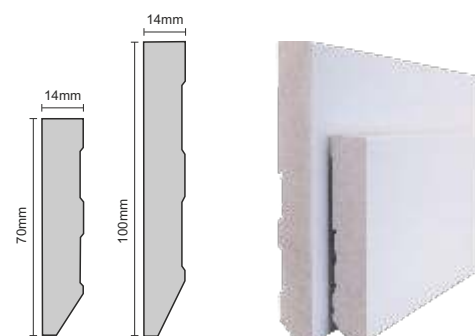

SUB CAMADA - UNDERLAY

UNDERLAY'S ADEQUADOS PARA PISO RADIANTE



Dimensões:

15x1mx1mm = 15m²
Ref.:F10.NF.SP.HEAT.1AS

NomaFloor Special Heat Flow 1mm Aquastop



Dimensões:

12.5x1.2mx2.2mm = 15m²
Ref.:F10.NF.COMFT.2.2AS

NomaFloor Comfort 2.2mm Aquastop

Dimensões:

10x3mx2.2mm = 15m²
Ref.:F10.EVA2ALU

EVA Perclic 2mm



DEGRAUS DE ESCADA



Possibilidade de revestimento de escadas com os pavimentos apresentados.

*Dá a solução de continuação do pavimento numa escada
*Disponíveis em todas as cores dos pavimentos deste catálogo

Revesperfil

Perfis e Revestimentos, Lda

O seu distribuidor Floorpan® em Portugal

www.revesperfil.pt



With all technical details and 3D images, Kastamonu Entegre products are available on your mobile phones and tablets. Download IDS 3D (Interior Design Studio 3D) application at your application store now and experience the reality!

You can download IDS 3D by searching it at your application store or scanning the QR codes.

www.keas.com.tr

KastamonuEntegre.A.S

KeasKurumsal

KastamonuEntegre A.S.

kastamonuentegre